


HW-BS024

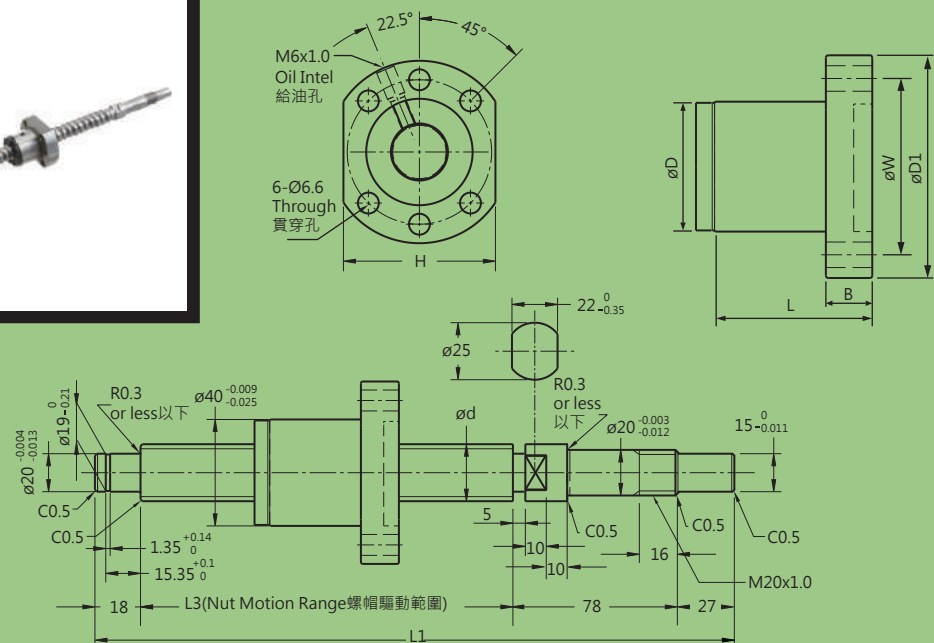

Type 品名	Accuracy Grade 精度等級	Material 材質	Delivery 交貨日
HW-BS024	C5	Shaft螺桿 S55C Nut螺帽 SCM420H	10 Working Days 10 個工作日

Type 品名				Shaft O.D. 軸徑尺寸			Nut Size 螺帽尺寸						Number of Circuits 循環數	Basic Ratingload C(動態)N (Dynamic)	基本額定負荷 Co(靜態)N (Static)
	d	Pitch	Ball Dia. 珠徑	L1	L3	D	D1	B	L	W	H				
HW-BS024	25	5	3.175	300~995	L1-123	40	62	10	40	51	48	3.8x1	7800	18200	
	25	10	3.175	300~1500	L1-126	40	62	12	62	51	48	3.8x1	11300	23400	
	25	25	3.175	300~1500	L1-126	40	62	12	70	51	48	1.8x1	7300	14100	

Order Ex. 訂購範例

HW-BS024-25-Pitch-L1



螺桿外徑
導程
螺桿長度

Alterations	追加加工名稱	Description	加工說明	Order Ex.	訂購範例
C		No machining added on the support side shaft end. 支撐側的軸端不加工。		HW-BS024-25-5-300-C	
E		Changes the nut direction. 變更螺帽方向。		HW-BS024-25-5-300-E	
F		No retaining ring groove on support side shaft end. 支撐側軸端無扣環槽加工。		HW-BS024-25-5-300-F	
G		Changes the machining on the support side. d2 is 10 or 12 or 15 or 20 ※5≤L4≤d2x3 ※L3 dimension is shortened 變更支撐側加工。 d2是10或12或15或20 ※5≤L4≤d2x3 ※L3尺寸變短		HW-BS024-25-5-300-G-10-20	d2 change to 10, L4 change to 20mm on the support side. 支撐端的d2變更為10，長度變更為20mm。
H		Changes the length of the support side shaft end. ※19≤H≤60 ※L3 dimension is shortened 變更支撐側軸端長度。 ※19≤H≤60 ※L3尺寸變短		HW-BS024-25-5-300-H20	Length of support side change to 20mm. 支撐端長度變更為20mm。
I		Adds a tapped hole on the support side shaft end. ※M=M8x1.25, ℓ=20 ※28≤ℓ≤60 ※L3 dimension is shortened 於支撐側軸端進行攻牙加工。 ※28≤ℓ≤60 ※L3尺寸變短		HW-BS024-25-5-300-I30	Length of tapped hole is 30mm on the support side. 支撐端攻牙加工深度30mm。
K		Adds a keyway on the fixed side shaft end. ※5 ≤ K ≤ 26 於固定側軸端進行鍵槽加工。 ※5 ≤ K ≤ 26		HW-BS024-25-5-300-K5	Length of keyway is 5mm. 鍵槽長度5mm。
M		Adds a keyway at a customer specified area on the fixed side shaft end. ※6 ≤ M+S ≤ 26 可指定固定側軸端鍵槽加工的位置。 ※6 ≤ M+S ≤ 26		HW-BS024-25-5-300-M5-S3	Length of keyway is 5mm, keyway to the end of shaft is 3mm. 鍵槽長度5mm至端面長度3mm。
N		Adds a flat on the fixed side shaft end. ※5 ≤ N ≤ 26 於固定側軸端進行平面加工。 ※5 ≤ N ≤ 26		HW-BS024-25-5-300-N10	Length of flat is 10mm. 平面長度10mm。
O		Adds two flats on the fixed side shaft end(90°). ※5 ≤ O ≤ 26 於固定側軸端做2處平面加工(90°). ※5 ≤ O ≤ 26		HW-BS024-25-5-300-O10	Length of 90° flat is 10mm. 90°平面長度10mm。
R		Adds two flats on the fixed side shaft end(120°). ※5 ≤ R ≤ 26 於固定側軸端做2處平面加工(120°). ※5 ≤ R ≤ 26		HW-BS024-25-5-300-R10	Length of 120° flat is 10mm. 120°平面長度10mm。