


HFA024

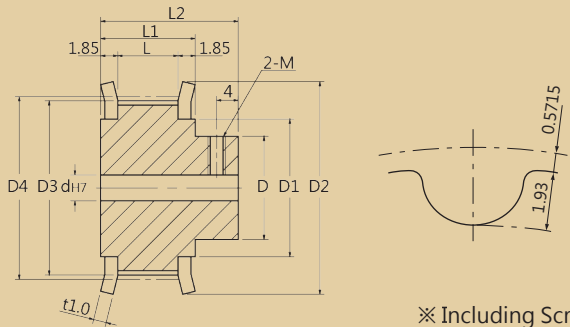

※ Including Screws 附螺栓

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA024-A	Aluminium 鋁合金	Anodizing 白色陽極	8 Working Days 8 個工作日
HFA024-B	S45C 中碳鋼	-	
HFA024-C		Blackening 染黑	


The Tapped Hole Dimensions 螺紋孔尺寸表	
d	M
6~12	4
13~30	5
※ Apply for Hole Alteration II、III 適用於II、III加工服務	

Hole Alteration 孔加工服務	I Hole 孔	II Hole+Tap 圓孔+攻牙	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 軸頸孔-軸轂側沉頭孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(II) (u:1mm)	d(III) (u:1mm)	d(IV&V) (u:1mm)	d1(IV&V) (u:1mm)	L3(IV&V) (u:1mm)	Belt Width 皮帶寬度 (L/L1/L2)	D	D1	D2	D3	D4
HFA024-A HFA024-B HFA024-C	14	6~8	-	-	-	-	2≤L3≤L2-2	9mm 10.3/14.0/22.0	12	16	26	21.14	22.28
	15	6~10	-	-	6	8			13	17	27	22.73	23.87
	16	6~12	6	-	6~8	8~10			15	19	29	24.32	25.46
	18	6~14	6~9	-	6~10	8~12			18	22	32	27.51	28.65
	20	8~15	8~10	8	8~13	10~15			20	24	35	30.69	31.83
	22	8~19	8~12	8	8~14	10~16			22	27	39	33.87	35.01
	24	8~22	8~16	8~10	8~16	10~18		12mm 13.3/17.0/25.0	26	30	42	37.06	38.20
	25	8~22	8~16	8~12	8~18	10~20			28	32	43	38.65	39.79
	26	10~24	10~16	10~13	10~20	12~22			28	33	45	40.24	41.38
	28	10~27	10~20	10~15	10~25	12~27			30	36	48	43.42	44.56
	30	10~28	10~22	10~16	10~26	12~28			32	39	51	46.61	47.75
	32	10~30	10~22	10~17	10~26	12~28			34	42	55	49.79	50.93
	34	12~32	12~24	12~18	12~28	14~30		15mm 16.3/20.0/28.0	36	46	58	52.97	54.11
	36	12~34	12~26	12~20	12~30	14~32			38	49	61	56.16	57.30
	40	12~36	12~26	12~22	12~32	14~34			40	55	67	62.52	63.66
	44	12~38	12~26	12~23	12~34	14~36			42	62	74	68.89	70.03
	48	12~42	12~30	12~26	12~36	14~38			46	68	80	75.25	76.39
	50	12~42	12~30	12~27	12~38	14~40			46	71	83	78.44	79.58
	60	12~44	12~30	12~30	12~40	14~42			52	87	99	94.35	95.49

Order Ex. 訂購範例

HFA024-□-14-□-d-(d1)-□-(L3)-5GT-B



A B or C
Teeth
I II III IV or V
Internal Diameter of Hole
Internal Diameter of Hole(IV&V Type)
Width of Timing Pulley(9/12/15mm)
Length of Hole(IV&V Type)

選擇皮帶輪材質及表面處理方式
齒數
選擇孔加工類型(I/II/III/IV/V)
軸孔內徑
軸孔內徑(適用於IV&V型)
皮帶輪寬度(9/12/15mm)
軸孔長度(適用於IV&V型)

Alterations	追加加工名稱	Description	加工說明	Order Ex. 訂購範例
O		Set Screw Angle 變更止迴螺絲角度		HFA024-A-14-I-6-9-5GT-B-O Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)		HFA024-A-14-I-6-9-5GT-B-P3 Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)		HFA024-A-14-I-6-9-5GT-B-Q4 Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不鉚接		HFA024-A-14-I-6-9-5GT-B-R Flange not Attached 法蘭不鉚接
S		Flange Cut 法蘭切割		HFA024-A-14-I-6-9-5GT-B-S Flange Cut 法蘭切割