


HAP025

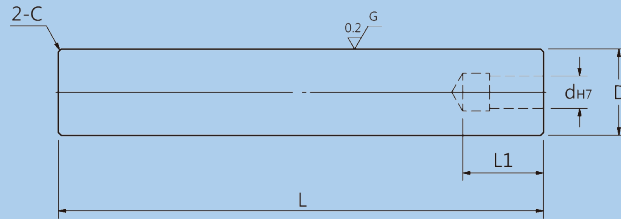

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Hardness Penetration 熱處理深度	Delivery 交貨日
HAP025	SUJ2(1.3505) 軸承鋼	Hardened -D≤25 整體淬火 Surface Hardened -D≥30 高頻淬火	HRC58~	1.5~2mm-D≥30	3 Working Days 3 個工作日

OD. TOL. 外徑公差	
D	TOL.
10	-0.015 -0.020
12~16	-0.020 -0.025
20~30	-0.025 -0.030

ID. TOL. 內徑公差	
d	TOL.
5~6	+0.012 0
8~10	+0.015 0
13	+0.018 0

Type	D	L(u:5mm)	d	L1	C	Dowel Pin
HAP025	10	40~100	5	12	0.5	5-25
	12	40~100	6	15	0.5	6-30
	13	40~150	6	15	0.5	6-30
	16	40~150	6	15	0.5	6-30
	20	50~175	8	20	0.5	8-40
	25	50~250	10	20	0.5	10-40
	30	50~300	13	25	0.5	13-50

Order Ex. 訂購範例

HAP025-D-L

Alterations	追加工名稱	Description	加工說明	Order Ex.	訂購範例
A		Length change 長度尺寸變更		HAP025-10-A32 Length change to 32mm 長度尺寸變更為32mm	
B		Length tolerance change 長度尺寸公差變更		HAP025-10-50-B(0~-0.02mm) Length tolerance change to 0~-0.02mm 長度公差變更為0~-0.02mm	
L		Adds wrench flats 板手槽加工		HAP025-10-50-L or 2L Wrench flats at one or two location 單板手槽或雙板手槽追加	