


HFP036

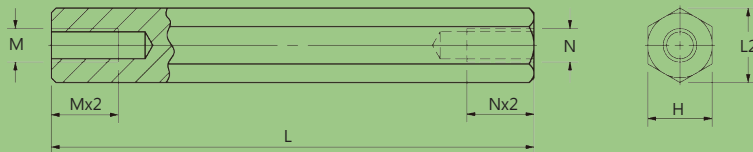


| Type<br>品名 | Material<br>材質 | Surface Treatment<br>表面處理              | Delivery<br>交貨日          |
|------------|----------------|----------------------------------------|--------------------------|
| HFP036-A   | 1015<br>低碳鋼    | -                                      | 5 Working Days<br>5 個工作日 |
| HFP036-B   |                | Blackening<br>染黑                       |                          |
| HFP036-C   |                | Nickel Electroless<br>鍍無電解鍍            |                          |
| HFP036-D   |                | Black Chromium<br>Electroplating<br>黑鉻 |                          |
| HFP036-E   | SUS304<br>不鏽鋼  | -                                      |                          |

| L(mm) | TOL公差<br>(mm) |
|-------|---------------|
| <300  | ±0.2          |
| <600  | ±0.3          |
| <800  | ±0.4          |

| Type                                                     | H  | L(u:0.5mm) | M&N                | L2   |
|----------------------------------------------------------|----|------------|--------------------|------|
| HFP036-A<br>HFP036-B<br>HFP036-C<br>HFP036-D<br>HFP036-E | 5  | 8~50       | 2/2.6              | 5.8  |
|                                                          | 6  | 15~50      | 3/4                | 6.9  |
|                                                          | 7  | 15~150     | 3/4/5              | 8.1  |
|                                                          | 8  | 20~250     | 3/4/5/6            | 9.2  |
|                                                          | 10 | 25~350     | 4/5/6/8            | 11.5 |
|                                                          | 12 | 25~400     | 4/5/6/8            | 13.9 |
|                                                          | 13 | 30~400     | 4/5/6/8/10         | 15   |
|                                                          | 14 | 30~500     | 4/5/6/8/10         | 16.2 |
|                                                          | 17 | 40~500     | 5/6/8/10/12        | 19.6 |
|                                                          | 19 | 50~500     | 5/6/8/10/12/16     | 21.9 |
|                                                          | 24 | 50~600     | 6/8/10/12/16/20    | 27.7 |
|                                                          | 27 | 60~600     | 6/8/10/12/16/20    | 31.2 |
|                                                          | 30 | 60~600     | 6/8/10/12/16/20/24 | 34.6 |
|                                                          | 32 | 75~600     | 6/8/10/12/16/20/24 | 36.9 |

Order Ex. 訂購範例

HFP036-□-5-L-M-N

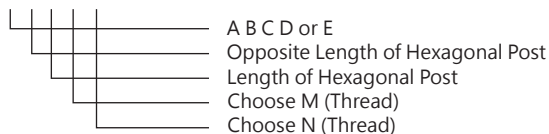

選擇六角柱材質  
六角柱對邊長度  
六角柱長度  
選擇螺紋M  
選擇螺紋N

| Alterations | 追加工名稱 | Description                       | 加工說明 | Order Ex. 訂購範例                                                                   |
|-------------|-------|-----------------------------------|------|----------------------------------------------------------------------------------|
| A           |       | Length tolerance change<br>長度公差變更 |      | HFP036-A-5-10-M2-N2-A(±0.03)<br>Length tolerance change to ±0.03<br>長度公差變更為±0.03 |