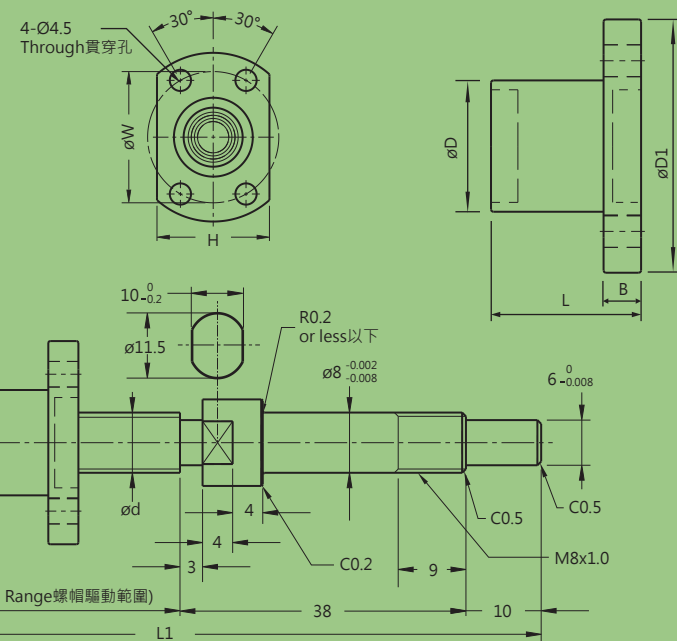


HW-BS020













Type 品名	Accuracy Grade 精度等級	Material 材質	Delivery 交貨日
HW-BS020	C5	Shaft螺桿	10 Working Days
		S55C	10 個工作日

Type 品名				Shaft O.D. 軸徑尺寸			Nut Size 螺帽尺寸						Number of Circuits 循環數	Basic Rating Load C(動態)N (Dynamic)	基本額定負荷 Co(靜態)N (Static)
	d	Pitch	Ball Dia. 球徑	L1	L3	D	D1	B	L	W	H				
HW-BS020	12	2	1.2	150~445	L1-57	20	37	5	28	29	24	1x4	1700	2900	

Order Ex. 訂購範例

HW-BS020-12-Pitch-L1



Alterations	追加加工名稱	Description	加工說明	Order Ex.	訂購範例						
C		No machining added on the support side shaft end. 支撐側的軸端不加工。		HW-BS020-12-2-150-C							
E		Changes the nut direction. 變更螺帽方向。		HW-BS020-12-2-150-E							
F		No retaining ring groove on support side shaft end. 支撐側軸端無扣環槽加工。		HW-BS020-12-2-150-F							
G		Changes the machining on the support side. d2 is 6 or 8 ※5≤L4≤d2x3 ※L3 dimension is shortened ※Not applicable to Pitch=2 變更支撐側加工。 d2是6或8 ※5≤L4≤d2x3 ※L3尺寸變短 ※不適用Pitch=2		HW-BS020-12-2-150-G-8-20 d2 change to 8, L4 change to 20mm on the support side. 支撐端的d2變更為8，長度變更為20mm。							
H		Changes the length of the support side shaft end. ※L3 dimension is shortened 變更支撐側軸端長度。 ※L3尺寸變短	<table><tr><th>Pitch</th><th>ℓ</th><th>H Range</th></tr><tr><td>2</td><td>6.8</td><td>10 ≤ H ≤ 20</td></tr></table>	Pitch	ℓ	H Range	2	6.8	10 ≤ H ≤ 20	HW-BS020-12-2-150-H15 Length of support side change to 15mm. 支撐端長度變更為15mm。	
Pitch	ℓ	H Range									
2	6.8	10 ≤ H ≤ 20									
K		Adds a keyway on the fixed side shaft end. ※3≤K≤14(9) 於固定側軸端進行鍵槽加工。 ※3≤K≤14(9)		HW-BS020-12-2-150-K5 Length of keyway is 5mm. 鍵槽長度5mm。							
M		Adds a keyway at a customer specified area on the fixed side shaft end. ※4 ≤ M+S ≤ 14(9) 可指定固定側軸端鍵槽加工的位置。 ※4 ≤ M+S ≤ 14(9)		HW-BS020-12-2-150-M5-S3 Length of keyway is 5mm, keyway to the end of shaft is 3mm. 鍵槽長度5mm至端面長度3mm。							
N		Adds a flat on the fixed side shaft end. ※5 ≤ N ≤ 14(9) 於固定側軸端進行平面加工。 ※5 ≤ N ≤ 14(9)		HW-BS020-12-2-150-N9 Length of flat is 9mm. 平面長度9mm。							
O		Adds two flats on the fixed side shaft end(90°). ※5 ≤ O ≤ 14(9) 於固定側軸端做2處平面加工(90°). ※5 ≤ O ≤ 14(9)		HW-BS020-12-2-150-O9 Length of 90° flat is 9mm. 90°平面長度9mm。							
R		Adds two flats on the fixed side shaft end(120°). ※5 ≤ R ≤ 14(9) 於固定側軸端做2處平面加工(120°). ※5 ≤ R ≤ 14(9)		HW-BS020-12-2-150-R9 Length of 120° flat is 9mm. 120°平面長度9mm。							