


Type 品名	Material 材質	Hardness 硬度	Delivery 交貨日
HTP065-A	Equivalent to SKD11 SKD11同級	60~63HRC	8 Working Days 8 個工作日
HTP065-B	Powdered Highspeed Steel 粉末高速鋼	64~67HRC	

D Tolerance 柄部直徑公差	
a	m5
b	+0.005 0

Type 品名	D	L (u:10mm)	H
HTP065-A HTP065-B	5	40~80	3
	6	40~80	3
	8	40~100	4
	10	40~100	5
	13	40~100	6
	16	40~100	6
	20	40~100	6
25	40~100	6	

Order Ex. 訂購範例

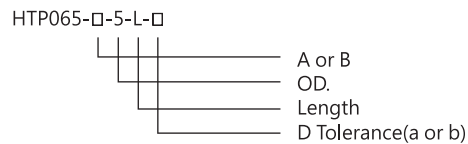

沖頭材質  
外徑  
長度  
柄部直徑公差(a or b)

Alterations 追加工名稱	Description 加工說明	Order Ex. 訂購範例
LC 	Length change 長度變更 $20 \leq LC < L$ *0.1mm increments 指定單位0.1mm	HTP065-A-5-50-a-LC
LKC LKZ 	Full length tolerance change 變更全長公差 LKC → L $\begin{matrix} +0.3 \\ 0 \end{matrix}$ → $\begin{matrix} +0.05 \\ 0 \end{matrix}$ LKZ → L $\begin{matrix} +0.3 \\ 0 \end{matrix}$ → $\begin{matrix} +0.01 \\ 0 \end{matrix}$	HTP065-A-5-50-a-LKC
KC 	Addition of single key flat to head 頭緣部止迴1面加工	HTP065-A-5-50-a-KC
WKC 	Addition of double key flats in parallel 頭緣平行加工(2面)	HTP065-A-5-50-a-WKC
NC 	The jector pin is removed. 拔除頂出銷 * Cannot be combined with AC 不可與AC併用	HTP065-A-5-50-a-NC