


HAB030

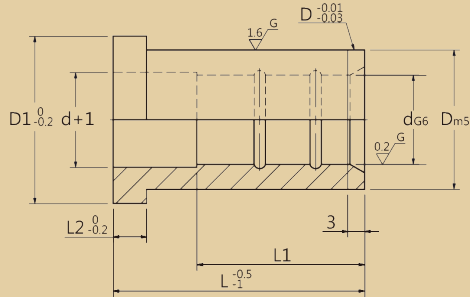

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Delivery 交貨日
HAB030	SUJ2(1.3505) 軸承鋼	Hardened 整體淬火	HRC58~	5 Working Days 5 個工作日

ID. TOL. 內徑公差	
d	G6
8~10	+0.014 +0.005
12~16	+0.017 +0.006
20~30	+0.020 +0.007
32~50	+0.025 +0.009
60	+0.029 +0.010

OD. TOL. 外徑公差	
D	m5
12~18	+0.015 +0.007
20~30	+0.017 +0.008
35~48	+0.020 +0.009
50~80	+0.024 +0.011

Type	d	L	D	D1	L1	L2
HAB030	8	15/20/25	12	14	L1=L≤15	5
	10	15/20/25/30/35/40	14	16	L1=L≤20	5
	12	15/20/25/30/35/40/45/50	18	22	L1=L≤25	5
	13	15/20/25/30/35/40/45/50	20	25	L1=L≤25	5
	16	15/20/25/30/35/40/45/50	25	30	L1=L≤30	6
	20	20/25/30/35/40/45/50/60/70/80	30	35	L1=L≤40	8
	25	20/25/30/35/40/45/50/60/70/80/90/100/110/120/130	35	40	L1=L≤50	8
	28	25/30/35/40/45/50/60/70/80	40	45	L1=L≤56	8
	30	25/30/35/40/45/50/60/70/80/90/100/110/120/130	42	47	L1=L≤60	8
	32	25/30/35/40/45/50/60/70/80/90/100/110/130	45	50	L1=L≤60	8
	35	30/35/40/50/60/70/80/90/100/110/120/130	48	54	L1=L≤70	8
	40	30/35/40/45/50/60/70/80/90/100/110/120/130	55	60	L1=L≤80	10
	50	40/45/50/60/70/80/90/100/110/120/130/140/150	70	75	L1=L≤100	12
	60	60/70/80/90/100/110/120/130/140/150	80	86	L1=L≤120	12

Order Ex. 訂購範例

HAB030-d-L

Alterations	追加工名稱	Description	加工說明	Order Ex.	訂購範例
A		Length change 長度尺寸變更		HAB030-8-A53 Length change to 53mm 長度改為53mm	