


HAA007

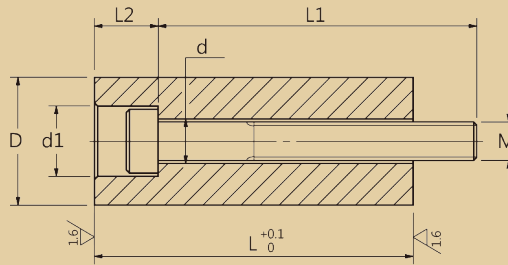

※ Including Screws 附螺栓

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Delivery 交貨日
HAA007	S45C-Body 中碳鋼-本體 SCM435-Screw 鉻鉬鋼-螺栓	Hardened 整體淬火	HRC54~58- Body 本體	7 Working Days 7 個工作日

Type	D	L(u:0.1mm)	L1(u:5mm)	C	MxP	d	d1	L2
HAA007	10	10.0~40.0	10~40	R/Y/N	M3x0.5	4	6	5
	12	10.0~40.0	10~40	R/Y/N	M3x0.5	4	6	5
	14	15.0~50.0	10~50	R/Y/N	M4x0.7	5	8	8
	16	15.0~50.0	10~50	R/Y/N	M4x0.7	5	8	8
	18	20.0~70.0	15~70	R/Y/N	M5x0.8	6	9.5	10
	20	20.0~80.0	15~80	R/Y/N	M6x1.0	7	11	13
	25	22.0~100.0	15~100	R/Y/N	M8x1.25	9	14	15
	32	22.0~120.0	15~120	R/Y/N	M8x1.25	9	14	15
	38	25.0~120.0	20~120	R/Y/N	M10x1.5	11	17	18
	50	25.0~120.0	20~120	R/Y/N	M10x1.5	11	17	18
	60	30.0~150.0	25~150	R/Y/N	M12x1.75	13	20	21

※ R: Red 紅色 / Y: Yellow 黃色 / N: Normal 標準

Order Ex. 訂購範例

HAA007-D-L-L1-C

Alterations	追加工名稱	Description	加工說明	Order Ex.	訂購範例
A		Length or height change 長度或厚度尺寸變更		HAA007-10-A20-30-N Length change to 20mm 長度尺寸變更為20mm	
B		Tolerance of length or height change 長度或厚度尺寸公差變更		HAA007-10-20-30-N-B(0~-0.02) Height tolerance change to 0~-0.02mm 長度尺寸公差變更為0~-0.02mm	