

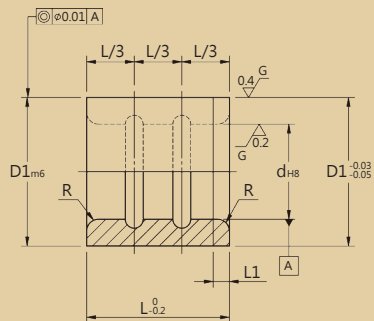



HFB049

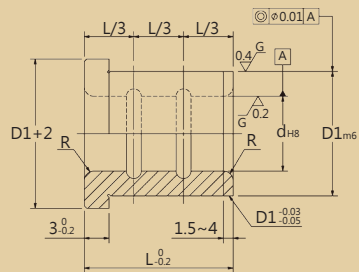

HFB050




Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Delivery 交貨日
HFB049 HFB050	SUJ2 軸承鋼	Hardened 整體淬火	HRC58~	7 Working Days 7 個工作日

Type	d	TOL.	L	D1	TOL.	L1	R
HFB049	5	+0.018 0	5/6/8/10/12/16	10	+0.015 +0.006	1.5	0.5
	6	+0.018 0	6/8/10/12/16	12	+0.018 +0.007	2	0.5
	8	+0.022 0	8/10/12/16/20	14	+0.018 +0.007	3	1
	10	+0.022 0	8/10/12/16/20	16	+0.018 +0.007	3	1
	12	+0.027 0	10/12/16/20/25	18	+0.018 +0.007	3	1.2
	13	+0.027 0	10/12/16/20/25	22	+0.021 +0.008	3	1.2
	15	+0.027 0	16/20/25/30	25	+0.021 +0.008	4	1.5
	16	+0.027 0	16/20/25/30	26	+0.021 +0.008	4	1.5
	20	+0.033 0	16/20/25/30	30	+0.021 +0.008	4	2
	25	+0.033 0	20/25/30/35	35	+0.025 +0.009	4	2

Type	d	TOL.	L	D1	TOL.	L1	R
HFB050	5	+0.018 0	8/10/12/16	10	+0.015 +0.006	1.5	0.5
	6	+0.018 0	8/10/12/16	12	+0.018 +0.007	2	0.5
	8	+0.022 0	8/10/12/16/20	14	+0.018 +0.007	3	1
	10	+0.022 0	8/10/12/16/20	16	+0.018 +0.007	3	1
	12	+0.027 0	10/12/16/20/25	18	+0.018 +0.007	3	1.2
	13	+0.027 0	10/12/16/20/25	22	+0.021 +0.008	3	1.2
	15	+0.027 0	16/20/25/30	25	+0.021 +0.008	4	1.5
	16	+0.027 0	16/20/25/30	26	+0.021 +0.008	4	1.5
	20	+0.033 0	16/20/25/30	30	+0.021 +0.008	4	2
	25	+0.033 0	20/25/30/35	35	+0.025 +0.009	4	2


Order Ex. 訂購範例

HFB049-5-L



內徑尺寸
導套長度

HFB050-5-L



內徑尺寸
導套長度