
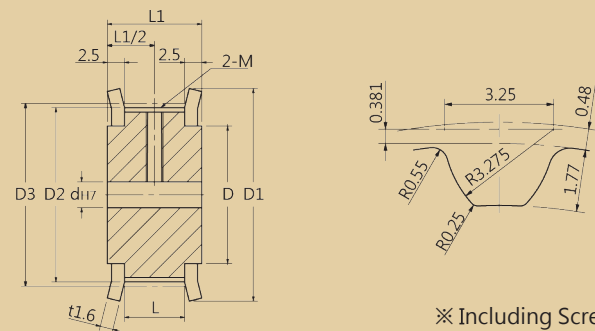


HFA004

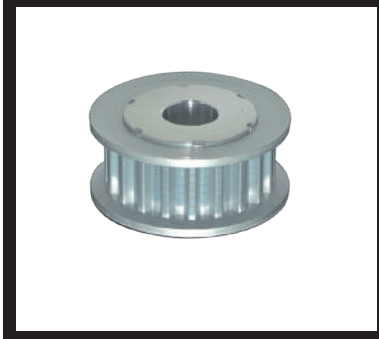

※ Including Screws 附螺栓

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA004-A	Aluminium 鋁合金	Anodizing 白色陽極	5 Working Days 5 個工作日
HFA004-B		Black Anodizing 黑色陽極	
HFA004-C		Hard Anodizing 硬質陽極	
HFA004-D		Nickel Electroless 無電解鍍	
HFA004-E	S45C 中碳鋼	-	
HFA004-F		Blackening 染黑	
HFA004-G		Nickel Electroless 無電解鍍	


The Tapped Hole Dimensions 螺紋孔尺寸表	
d	M
5	3
6~12	4
13~17	5
18~30	6
31~45	8
46~65	10
※ Apply for Hole Alteration II、III 適用於II、III加工服務	

Hole Alteration 孔加工服務	I Hole 孔	II Hole+Tap 圓孔+攻牙	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 雙邊軸頸孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(II) (u:1mm)	d(III) (u:1mm)	d(IV) (u:1mm)	d1(IV) (u:1mm)	d(V) (u:1mm)	d2&d3(V) (u:1mm)	L2(IV) (u:1mm)	L3&L4(V) (u:1mm)	Belt Width 皮帶寬度 (L/L1)	D	D1	D2	D3
HFA004-A HFA004-B HFA004-C HFA004-D HFA004-E HFA004-F HFA004-G	14	5~10	5~10	8/10	5/6	7~10	5/6	7/8	2≤L2≤L1-2	3~14	10mm 11/16	16	26	21.32	22.28
	15	5~10	5~10	8/10	5~8	7~10	5~8	7~10				18	28	22.91	23.87
	16	5~12	5~12	8~12	5~10	7~12	5~10	7~12				20	32	24.50	25.46
	18	6~14	6~12	8~12	6~12	8~14	6~12	8~14				22	33	27.69	28.65
	19	6~16	6~16	8~16	6~14	8~16	6~14	8~16				24	36	29.28	30.24
	20	6~16	6~16	8~16	6~14	8~16	6~14	8~16				24	36	30.87	31.83
	22	7~19	7~18	8~18	7~17	9~19	7~17	9~19				27	40	34.05	35.01
	24	7~22	7~20	8~20	7~20	9~23	7~20	9~22				30	45	37.24	38.20
	25	7~22	7~20	8~20	7~20	9~23	7~20	9~22				30	45	38.83	39.79
	26	8~27	8~22	8~22	8~25	10~27	8~25	10~27			15mm 17/22	35	48	40.42	41.38
	28	8~27	8~24	8~24	8~25	10~27	8~25	10~27				35	48	43.60	44.56
	30	10~28	10~26	10~26	10~26	12~28	10~26	12~28				36	52	46.79	47.75
	32	10~32	10~28	10~28	10~30	12~32	10~30	12~32				40	55	49.97	50.93
	34	10~37	10~30	10~30	10~35	12~37	10~35	12~37				45	61	53.15	54.11
	36	10~37	10~30	10~30	10~35	12~37	10~35	12~37			25mm 27/32	45	61	56.34	57.30
	40	10~42	10~38	10~38	10~40	12~42	10~40	12~42				50	67	62.70	63.66
	44	12~50	12~42	12~40	12~48	14~50	12~48	14~50				58	74	69.07	70.03
	48	12~55	12~45	12~40	12~53	14~55	12~53	14~55				63	83	75.43	76.39
	50	12~59	12~45	12~43	12~57	14~59	12~57	14~59				67	87	78.62	79.58
	60	12~72	12~45	12~45	12~70	14~72	12~70	14~72				80	99	94.53	95.49
	72	12~80	12~65	12~50	12~80	14~92	12~75	14~92				100	119	113.63	114.59

Order Ex. 訂購範例

HFA004-□-14-□-d-(d1-d2-d3)-□-(L2-L3-L4)-S5M-A



A B C D E F or G

Teeth

I II III IV or V

Internal Diameter of Hole

Internal Diameter of Hole(IV Type)

Internal Diameter of Hole(V Type)

Internal Diameter of Hole(V Type)

Width of Timing Pulley(10/15/25mm)

Length of Hole(IV Type)

Length of Hole(V Type)

Length of Hole(V Type)

選擇皮帶輪材質及表面處理方式

齒數

選擇孔加工類型(I/II/III/IV/V)

軸孔內徑

軸孔內徑(適用於IV型)

軸孔內徑(適用於V型)

軸孔內徑(適用於V型)

皮帶輪寬度(10/15/25mm)

軸孔長度(適用於IV型)

軸孔長度(適用於V型)

軸孔長度(適用於V型)

Alterations	追加加工名稱	Description	加工說明	Order Ex.	訂購範例
O		Set Screw Angle 變更止迴螺絲角度		HFA004-A-14-I-5-10-S5M-A-O	Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)		HFA004-A-14-I-5-10-S5M-A-P3	Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)		HFA004-A-14-I-5-10-S5M-A-Q4	Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不鉚接		HFA004-A-14-I-5-10-S5M-A-R	Flange not Attached 法蘭不鉚接
S		Flange Cut 法蘭切割		HFA004-A-14-I-5-10-S5M-A-S	Flange Cut 法蘭切割