


Bushing For Locating Pin-Compact Flanged with Oval Shape Type

定位銷用襯套-二面法蘭長圓孔型

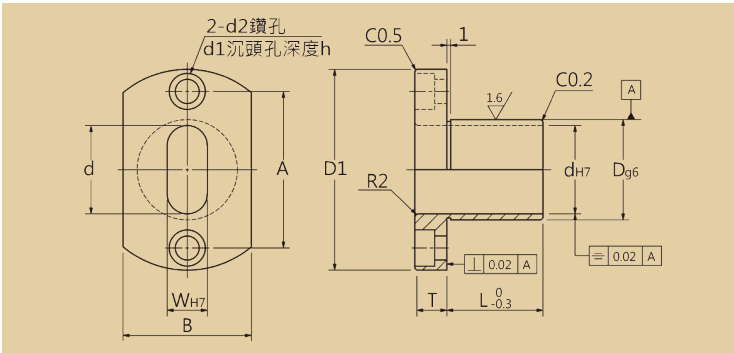

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Surface Treatment 表面處理	Delivery 交貨日
HFB046-A	SUJ2 軸承鋼	Hardened 整體淬火	HRC58~ HRC58以上	-	7 Working Days 7 個工作日
HFB046-B				Nickel Electroless 鍍無電解鎳	


OD. TOL. 外徑公差	
D	g6
10	-0.005 -0.014
12~16	-0.006 -0.017
20~30	-0.007 -0.020
35	-0.009 -0.025

ID. TOL. 內徑公差	
d	H7
4~5.99	+0.012 0
6~9.99	+0.015 0
10~17.99	+0.018 0
18~25	+0.021 0

Type	D	$d_{H7}(u:0.01mm)$	$W_{H7}(u:0.01mm)$	$L(u:1mm)$	T	D_1	A	B	d_2	d_1	h
HFB046-A HFB046-B	10	4.00~8.00	$3.00 \leq W < d$	$8 \sim 40$ $L+T \leq d \times 3$	5	25	17	12	3.3	6.5	3.5
	12	4.00~10.00			5	28	20	15	3.3	6.5	3.5
	16	8.00~14.00			6	36	26	22	4.5	8	4.5
	20	10.00~18.00			6	40	30	25	4.5	8	4.5
	22	13.00~22.00			6	44	34	30	4.5	8	4.5
	25	16.00~25.00			8	56	42	35	6.6	11	6.5
	30	18.00~25.00			8	60	46	40	6.6	11	6.5

Order Ex. 訂購範例

HFB046-□-10-d-W-L

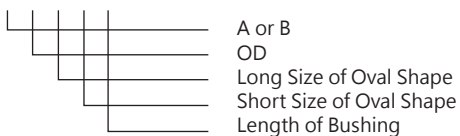

選擇材質和表面處理
外徑尺寸
長圓孔的長邊
長圓孔的短邊
導套長度