


# Step Screws For Fulcrum-Hexagonal Hole Type

## 支撐用軸頸螺絲-六角孔型

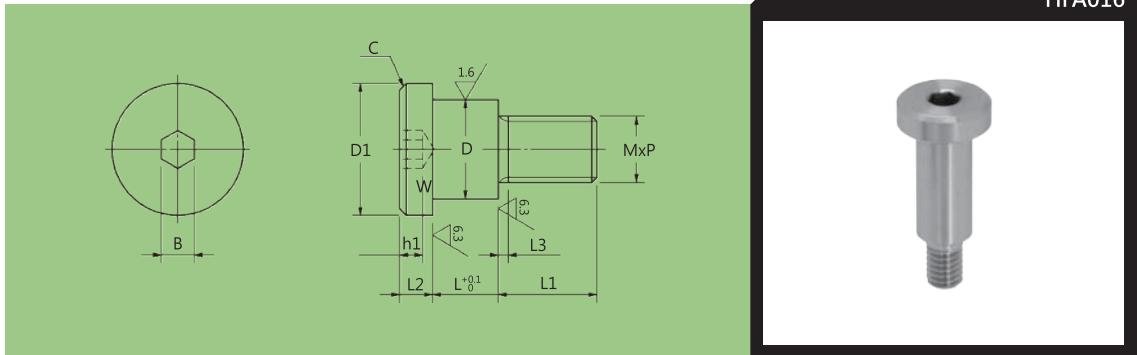


Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Surface Treatment 表面處理	Delivery 交貨日
HFA016-A	S45C 中碳鋼	Hardened 整體淬火	-	Blackening 染黑	7 Working Days 7 個工作日
HFA016-B			HRC40~45		
HFA016-C	SUS304 不鏽鋼	-	-		

OD. TOL. 外徑公差		
	Ⓛ	Ⓜ
D	g6	Standard 一般級
4~6	-0.004 -0.012	-0.01 -0.05
8 · 10	-0.005 -0.014	-0.01 -0.05
12~15	-0.006 -0.017	-0.01 -0.05

Type	D	L(u:0.1mm)	L1(u:1mm)	L2(u:0.1mm)	D1	MxP	L3	B	h1	C
HFA016-A	4	5~20	3.4	2.0~4.0	6	2.6x0.45	0.8	2	2	0.5
	5	5~20	3~6	2.0~4.0	8	3x0.5	1	2.5	2.5	0.5
	6	5~20	4~8	2.5~4.0	10	4x0.7	1.2	3	3	0.5
HFA016-B	8	5~20	5~10	2.5~4.0	12	5x0.8	1.4	4	3.5	1
	10	5~20	6~12	3.0~5.0	16	6x1.0	1.5	5	4	1
HFA016-C	12	5~20	8~12	3.0~5.0	18	8x1.25	1.5	5	4	1
	13	5~20	8~12	3.0~5.0	18	8x1.25	1.5	5	4	1
	15	5~20	10~15	3.0~5.0	20	10x1.5	1.5	5	4	1

### Order Ex. 訂購範例

HFA016-□-4-L-L1-L2

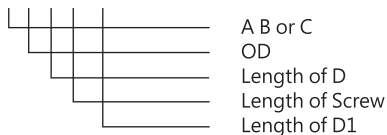

選擇材質和表面處理  
外徑尺寸  
D長度指定  
螺紋長度  
D1長度指定

※ u=unit