


HAP029

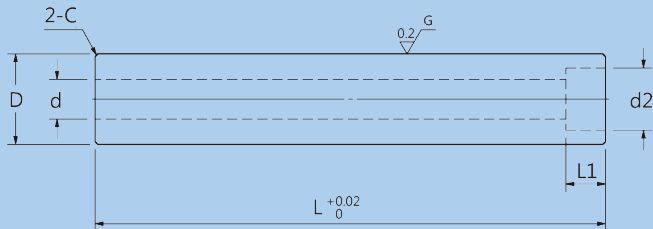

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Hardness Penetration 熱處理深度	Delivery 交貨日
HAP029	SUJ2(1.3505) 軸承鋼	Surface Hardened 高頻淬火	HRC58~	1.5~2mm	3 Working Days 3 個工作日

OD. TOL. 外徑公差	
D	TOL.
16	-0.020 -0.025
20~40	-0.025 -0.030

Type	D	L(u:5mm)	C	d	d2	L1	Applicable Bolts
HAP029	16	50~90	0.5	7	11	7	M6
	20	50~130	0.5	9	14	9	M8
	25	50~130	0.5	9	14	9	M8
	30	50~190	0.5	11	18	13	M10
	35	50~190	1.0	11	18	13	M10
	40	50~250	1.0	14	20	15	M12

Order Ex. 訂購範例

HAP029-D-L

Alterations	追加工名稱	Description	加工說明	Order Ex.	訂購範例
A		Length change 長度尺寸變更		HAP029-16-A32 Length change to 32mm 長度尺寸變更為32mm	