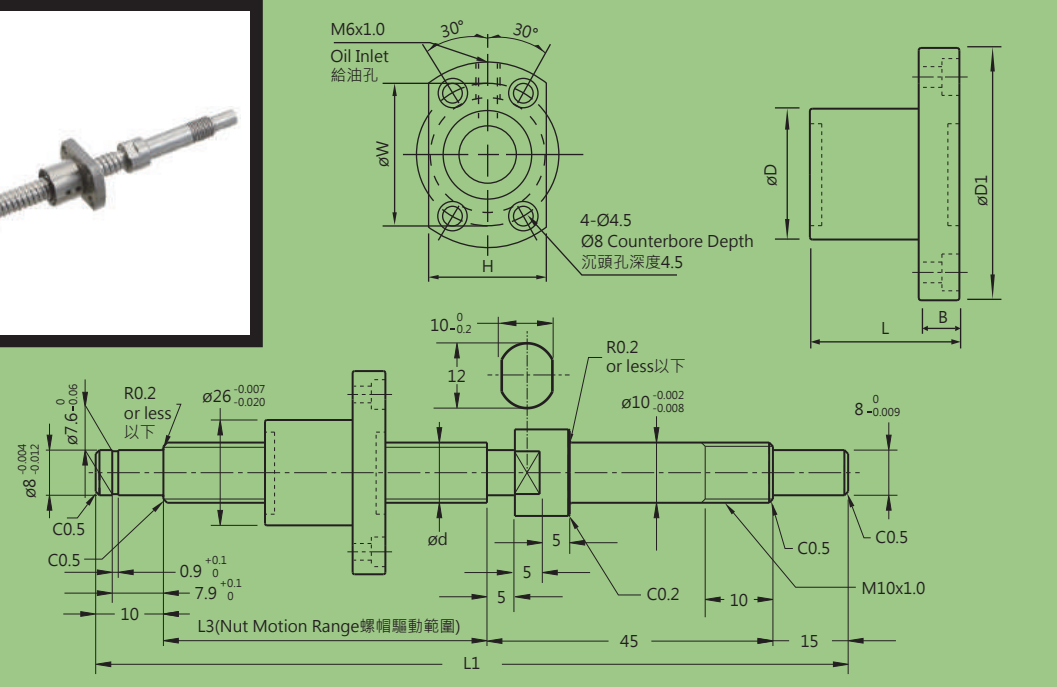


HW-BS019



Type 品名	Accuracy Grade 精度等級	Material 材質		Delivery 交貨日
HW-BS019	C5	Shaft螺桿	Nut螺帽	10 Working Days 10 個工作日
		S55C	SCM420H	









Type 品名	Ball Dia. 珠徑			Shaft O.D. 軸徑尺寸		Nut Size 螺帽尺寸								Number of Circuits 循環數	Basic Rating Load 基本額定負荷	
	d	Pitch		L1	L3	D	D1	B	L	W	H	C(動態)N (Dynamic)	Co(靜態)N (Static)			
HW-BS019	10	4	2	150~380	L1-70	26	46	10	34	36	28	1x3	2300	4100		

Order Ex. 訂購範例

HW-BS019-10-Pitch-L1



螺桿外徑
導程
螺桿長度

Alterations	追加加工名稱	Description	加工說明	Order Ex.	訂購範例						
C		No machining added on the support side shaft end. 支撐側的軸端不加工。		HW-BS019-10-4-150-C							
E		Changes the nut direction. 變更螺帽方向。		HW-BS019-10-4-150-E							
F		No retaining ring groove on support side shaft end. 支撐側軸端無扣環槽加工。		HW-BS019-10-4-150-F							
G		Changes the machining on the support side. d2 is 6 or 8 ※5≤L4≤d2x3 ※L3 dimension is shortened ※Not applicable to Pitch=2 變更支撐側加工。 d2是6或8 ※5≤L4≤d2x3 ※L3尺寸變短 ※不適用Pitch=2		HW-BS019-10-4-150-G-8-20 d2 change to 8, L4 change to 20mm on the support side. 支撐端的d2變更為8，長度變更為20mm。							
H		Changes the length of the support side shaft end. ※L3 dimension is shortened 變更支撐側軸端長度。 ※L3尺寸變短	<table><tr><th>Pitch</th><th>l</th><th>H Range</th></tr><tr><td>4</td><td>7.9</td><td>11 ≤ H ≤ 20</td></tr></table>	Pitch	l	H Range	4	7.9	11 ≤ H ≤ 20	HW-BS019-10-4-150-H15 Length of support side change to 15mm. 支撐端長度變更為15mm。	
Pitch	l	H Range									
4	7.9	11 ≤ H ≤ 20									
K		Adds a keyway on the fixed side shaft end. ※3≤K≤14 於固定側軸端進行鍵槽加工。 ※3≤K≤14		HW-BS019-10-4-150-K5 Length of keyway is 5mm. 鍵槽長度5mm。							
M		Adds a keyway at a customer specified area on the fixed side shaft end. ※4 ≤ M+S ≤ 14(9) 可指定固定側軸端鍵槽加工的位置。 ※4 ≤ M+S ≤ 14(9)		HW-BS019-10-4-150-M5-S3 Length of keyway is 5mm, keyway to the end of shaft is 3mm. 鍵槽長度5mm至端面長度3mm。							
N		Adds a flat on the fixed side shaft end. ※5 ≤ N ≤ 14(9) 於固定側軸端進行平面加工。 ※5 ≤ N ≤ 14(9)		HW-BS019-10-4-150-N9 Length of flat is 9mm. 平面長度9mm。							
O		Adds two flats on the fixed side shaft end(90°). ※5 ≤ O ≤ 14(9) 於固定側軸端做2處平面加工(90°). ※5 ≤ O ≤ 14(9)		HW-BS019-10-4-150-O9 Length of 90° flat is 9mm. 90°平面長度9mm。							
R		Adds two flats on the fixed side shaft end(120°). ※5 ≤ R ≤ 14(9) 於固定側軸端做2處平面加工(120°). ※5 ≤ R ≤ 14(9)		HW-BS019-10-4-150-R9 Length of 120° flat is 9mm. 120°平面長度9mm。							