
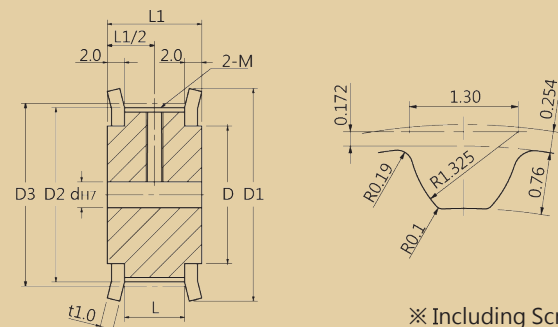


HFA037

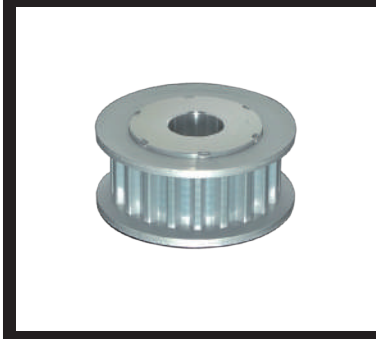

※ Including Screws 附螺栓

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA037-A	Aluminium 鋁合金	Anodizing 白色陽極	8 Working Days 8 個工作日
HFA037-B		Black Anodizing 黑色陽極	
HFA037-C		Hard Anodizing 硬質陽極	
HFA037-D		Nickel Electroless 無電解鍍	
HFA037-E	S45C 中碳鋼	-	
HFA037-F		Blackening 染黑	
HFA037-G		Nickel Electroless 無電解鍍	


The Tapped Hole Dimensions 螺紋孔尺寸表	
d	M
3~5	3
6~24	4
※ Apply for Hole Alteration II、III 適用於II、III加工服務	

Hole Alteration 孔加工服務	I Hole 孔	II Hole+Tap 圓孔+攻牙	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 雙邊軸頸孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(II) (u:1mm)	d(III) (u:1mm)	d(IV) (u:1mm)	d1(IV) (u:1mm)	d(V) (u:1mm)	d2&d3(V) (u:1mm)	L2(IV) (u:1mm)	L3&L4(V) (u:1mm)	Belt Width 皮帶寬度 (L/L1)	D	D1	D2	D3
HFA037-A HFA037-B HFA037-C HFA037-D HFA037-E HFA037-F HFA037-G	14	3/4	-	-	-	-	-	-	2≤L2≤L1-2	3~6	4mm 5/9	6	12	8.4	8.91
	15	3/4	-	-	-	-	-	-				6	12	9.04	9.55
	16	3~5	-	-	3	5	3	5				8	14	9.68	10.19
	18	3~5	-	-	3	5	3	5				8	14	10.95	11.46
	20	3~6	-	-	3/4	5/6	3/4	5/6				10	16	12.22	12.73
	22	3~6	-	-	3/4	5/6	3/4	5/6				11	18	13.5	14.01
	23	3~6	-	-	3/4	5/6	3/4	5/6				11	18	14.13	14.64
	24	3~7	-	-	3~5	5~7	3~5	5~7				13	20	14.77	15.28
	25	3~7	-	-	3~5	5~7	3~5	5~7			6mm 7/11	13	20	15.41	15.92
	26	3~8	-	-	3~6	5~8	3~6	5~8				14	22	16.04	16.55
	28	3~8	-	-	3~6	5~8	3~6	5~8				14	22	17.32	17.83
	30	3~8	-	-	3~6	5~8	3~6	5~8				14	22	18.59	19.10
	32	4~10	4~10	8	4~7	6~10	4~7	6~10				16	25	19.86	20.37
	34	4~10	4~10	8/10	4~7	6~10	4~7	6~10				16	25	21.14	21.65
	36	4~10	4~10	8/10	4~8	6~11	4~8	6~11				18	28	22.41	22.92
	40	4~12	4~12	8~12	4~10	6~12	4~10	6~12			10mm 11/15	20	30	24.96	25.46
	44	5~15	5~13	8~13	5~13	7~15	5~13	7~15				23	32	27.5	28.01
	48	5~17	5~15	8~15	5~15	7~17	5~15	7~17				25	35	30.05	30.56
	50	5~17	5~16	8~16	5~15	7~24	5~15	7~24				25	35	31.32	31.83
	60	5~24	5~22	8~22	5~22	7~24	5~22	7~24				32	44	37.69	38.20
	72	5~30	5~24	8~22	5~28	7~30	7~28	7~30				38	50	45.33	45.84

Order Ex. 訂購範例

HFA037-□-14-□-d-(d1-d2-d3)-□-(L2-L3-L4)-S2M-A



A B C D E F or G
Teeth
I II III IV or V
Internal Diameter of Hole
Internal Diameter of Hole(IV Type)
Internal Diameter of Hole(V Type)
Internal Diameter of Hole(V Type)
Width of Timing Pulley(4/6/10mm)
Length of Hole(IV Type)
Length of Hole(V Type)
Length of Hole(V Type)

選擇皮帶輪材質及表面處理方式
齒數
選擇孔加工類型(I/II/III/IV/V)
軸孔內徑
軸孔內徑(適用於IV型)
軸孔內徑(適用於V型)
軸孔內徑(適用於V型)
皮帶輪寬度(4/6/10mm)
軸孔長度(適用於IV型)
軸孔長度(適用於V型)
軸孔長度(適用於V型)

Alterations	追加工名稱	Description	加工說明	Order Ex.	訂購範例
O		Set Screw Angle 變更止迴螺絲角度		HFA037-A-14-I-3-4-S2M-A-O	Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)		HFA037-A-14-I-3-4-S2M-A-P3	Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)		HFA037-A-14-I-3-4-S2M-A-Q4	Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不銲接		HFA037-A-14-I-3-4-S2M-A-R	Flange not Attached 法蘭不銲接
S		Flange Cut 法蘭切割		HFA037-A-14-I-3-4-S2M-A-S	Flange Cut 法蘭切割
T		Tapped Hole Dimensions 牙孔尺寸變更		HFA037-A-14-I-3-4-S2M-A-T	Tapped Hole Dimensions Change 牙孔尺寸變更