


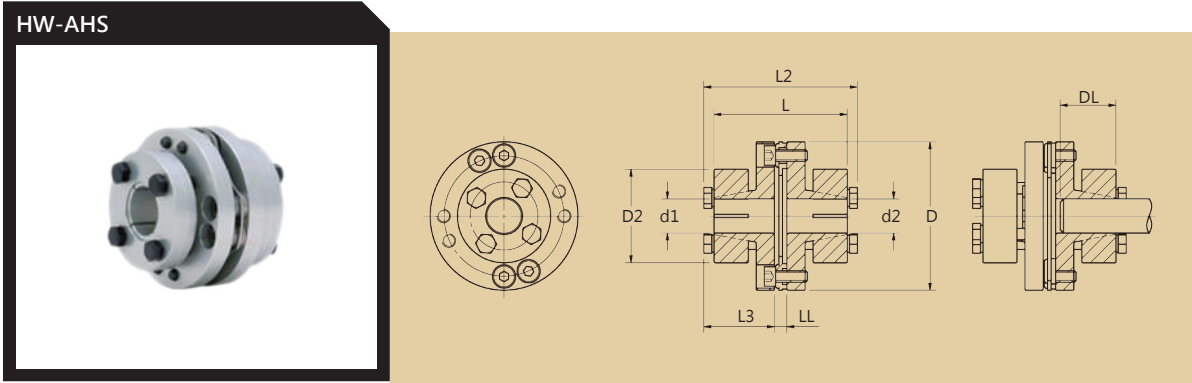

Type 項次	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HW-AHS	High tensile aluminum alloy 高強度鋁合金	Alumite 耐酸鋁 Black oxidation coating 黑色氧化膜	14 Working Days 14 個工作日
	SUS301 不鏽鋼		
	SCM435 鉻鉬鋼		
	S45C 中碳鋼		

Type	d1、d2 (mm)	D	L	L2	L3	LL	D2	DL	Sizes	N·m	kg
HW-AHS	12	65	58	67	26.5	5	39	22.5	M5x25	6	0.26
	14	65	58	67	26.5	5	39	22.5	M5x25	6	0.26
	15	65	58	67	26.5	5	41	22.5	M5x25	6	0.26
	16	65	58	67	26.5	5	41	22.5	M5x25	6	0.26
	18	65	58	67	26.5	5	44	22.5	M5x25	6	0.26
	20	65	49	58	22	5	48	18	M5x22	6	0.26
	22	65	49	58	22	5	48	18	M5x22	6	0.26
	24	65	49	58	22	5	53	18	M5x22	6	0.26
	25	65	49	58	22	5	53	18	M5x22	6	0.26
	28	65	49	58	22	5	58	18	M5x22	6	0.26
	12	65	58.5	67.5	26.5	5.5	39	22.5	M5x19	6	0.7
	14	65	58.5	67.5	26.5	5.5	39	22.5	M5x19	6	0.7
	15	65	58.5	67.5	26.5	5.5	41	22.5	M5x25	6	0.7
	16	65	58.5	67.5	26.5	5.5	41	22.5	M5x25	6	0.7
	17	65	58.5	67.5	26.5	5.5	41	22.5	M5x25	6	0.7
	18	65	58.5	67.5	26.5	5.5	44	22.5	M5x25	6	0.7
	19	65	58.5	67.5	26.5	5.5	44	22.5	M5x25	6	0.7
	20	65	49.5	58.5	22	5.5	48	18	M5x25	6	0.7
	22	65	49.5	58.5	22	5.5	48	18	M5x25	6	0.7
	24	65	49.5	58.5	22	5.5	53	18	M5x22	6	0.7
	25	65	49.5	58.5	22	5.5	53	18	M5x22	6	0.7
	28	65	49.5	58.5	22	5.5	58	18	M5x22	6	0.7
	30	65	49.5	58.5	22	5.5	58	18	M5x22	6	0.7
	32	65	49.5	58.5	22	5.5	63	18	M5x22	6	0.7
	35	65	49.5	58.5	22	5.5	63	18	M5x22	6	0.7

Type	d1、d2 (mm)	D	L	L2	L3	LL	D2	DL	Sizes	N·m	kg
HW-AHS	19	87	67	77	30	7	47	25	M6x30	13.7	1.6
	20	87	67	77	30	7	53	25	M6x30	13.7	1.6
	22	87	67	77	30	7	53	25	M6x30	13.7	1.6
	24	87	67	77	30	7	62	25	M6x30	13.7	1.6
	25	87	67	77	30	7	62	25	M6x30	13.7	1.6
	28	87	67	77	30	7	62	25	M6x30	13.7	1.6
	30	87	67	77	30	7	66	25	M6x30	13.7	1.6
	32	87	67	77	30	7	66	25	M6x30	13.7	1.6
	35	87	67	77	30	7	68	25	M6x30	13.7	1.6
	38	87	67	77	30	7	78	25	M6x30	13.7	1.6
	40	87	67	77	30	7	78	25	M6x30	13.7	1.6
	42	87	67	77	30	7	78	25	M6x30	13.7	1.6
	45	87	67	77	30	7	78	25	M6x30	13.7	1.6

最大容許扭矩 N·m		扭轉剛度 N·m / rad	容許偏角 °	容許軸端間隙 mm	軸向彈性常數 N/mm	最高轉速 min ⁻¹	慣性力矩 kg·m ²
產品參數	40	30000	0.6	±0.3	200	8000	1.60X10 ⁻⁴
	80	53900	0.6	±0.3	392	8000	4.53X10 ⁻⁴
	250	147000	0.6	±0.3	343	6000	1.68X10 ⁻⁴

d1·d2		12	14	15	16	17	18	19	20	22	24	25	28	30	32	35	38	40	42	45	
產品參數	軸防滑扭矩 N·m	22	26	28	40	40		40		40	40	40	40								
		60	70	75	80	80	80	80	80	80	80	80	80	80	80						
		150 150 180 200 220 240 250 250 250 250 250 250 250 250																			