


HFA023

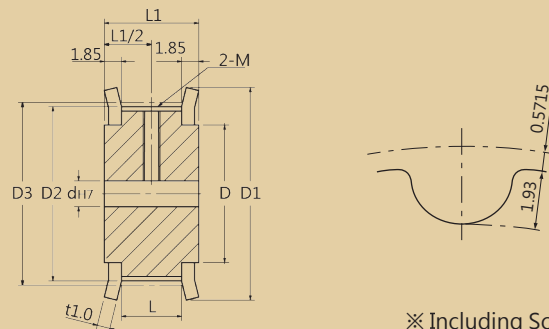

※ Including Screws 附螺栓

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA023-A	Aluminium 鋁合金	Anodizing 白色陽極	8 Working Days 8 個工作日
HFA023-B	S45C 中碳鋼	-	
HFA023-C		Blackening 染黑	

The Tapped Hole Dimensions 螺紋孔尺寸表	
d	M
6~12	4
13~30	5
31~45	6
※ Apply for Hole Alteration II、III 適用於II、III加工服務	

Hole Alteration 孔加工服務	I Hole 孔	II Hole+Tap 圓孔+攻牙	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 雙邊軸頸孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(II) (u:1mm)	d(III) (u:1mm)	d(IV) (u:1mm)	d1(IV) (u:1mm)	d(V) (u:1mm)	d2&d3(V) (u:1mm)	L2(IV) (u:1mm)	L3&L4(V) (u:1mm)	Belt Width 皮帶寬度 (L/L1)	D	D1	D2	D3
HFA023-A HFA023-B HFA023-C	14	6~10	6~8	-	6	8	6	8	2≤L2≤L1-2	3~14	9mm 10.3/14.0	16	26	21.14	22.28
	15	6~10	6~8	-	6~8	8~10	6~8	8~10				17	27	22.73	23.87
	16	6~12	6~10	8	6~10	8~12	6~10	8~12				19	29	24.32	25.46
	18	6~14	6~13	8~10	6~10	8~12	6~12	8~14				22	32	27.51	28.65
	20	8~16	8~14	8~12	8~14	10~16	8~14	10~16				24	35	30.69	31.83
	22	8~19	8~17	8~12	8~17	10~19	8~17	10~19				27	39	33.87	35.01
	24	8~22	8~18	8~14	8~20	10~23	8~20	10~22				30	42	37.06	38.20
	25	8~22	8~20	8~16	8~20	10~23	8~20	10~22				32	43	38.65	39.79
	26	10~27	10~21	10~17	10~25	12~27	10~25	12~27			12mm 13.3/17.0	33	45	40.24	41.38
	28	10~27	10~24	10~19	10~25	12~27	10~25	12~27				36	48	43.42	44.56
	30	10~28	10~26	10~20	10~26	12~28	10~26	12~28				39	51	46.61	47.75
	32	10~32	10~30	10~23	10~30	12~32	10~30	12~32				42	55	49.79	50.93
	34	12~37	12~32	12~26	12~35	14~37	12~35	14~37				46	58	52.97	54.11
	36	12~37	12~34	12~30	12~35	14~37	12~35	14~37				49	61	56.16	57.30
	40	12~42	12~36	12~30	12~40	14~42	12~40	14~42				55	67	62.52	63.66
	44	12~50	12~42	12~30	12~48	14~50	12~48	14~50			15mm 16.3/20.0	62	74	68.89	70.03
	48	12~55	12~45	12~30	12~53	14~55	12~53	14~55				68	80	75.25	76.39
	50	12~59	12~45	12~30	12~57	14~59	12~57	14~59				71	83	78.44	79.58
	60	12~72	12~45	12~30	12~70	14~72	12~70	14~72				87	99	94.35	95.49

Order Ex. 訂購範例

HFA023-□-14-□-d-(d1-d2-d3)-□-(L2-L3-L4)-5GT-A

□	A B or C
□	Teeth
□	I II III IV or V
□	Internal Diameter of Hole
□	Internal Diameter of Hole(IV Type)
□	Internal Diameter of Hole(V Type)
□	Internal Diameter of Hole(V Type)
□	Width of Timing Pulley(9/12/15mm)
□	Length of Hole(IV Type)
□	Length of Hole(V Type)
□	Length of Hole(V Type)

選擇皮帶輪材質及表面處理方式
齒數
選擇孔加工類型(I/II/III/IV/V)
軸孔內徑
軸孔內徑(適用於IV型)
軸孔內徑(適用於V型)
軸孔內徑(適用於V型)
皮帶輪寬度(9/12/15mm)
軸孔長度(適用於IV型)
軸孔長度(適用於V型)
軸孔長度(適用於V型)

Alterations	追加加工名稱	Description 加工說明	Order Ex. 訂購範例
O		Set Screw Angle 變更止迴螺絲角度	HFA023-A-14-I-6-9-5GT-A-O Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)	HFA023-A-14-I-6-9-5GT-A-P3 Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)	HFA023-A-14-I-6-9-5GT-A-Q4 Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不銲接	HFA023-A-14-I-6-9-5GT-A-R Flange not Attached 法蘭不銲接
S		Flange Cut 法蘭切割	HFA023-A-14-I-6-9-5GT-A-S Flange Cut 法蘭切割