


HFA001

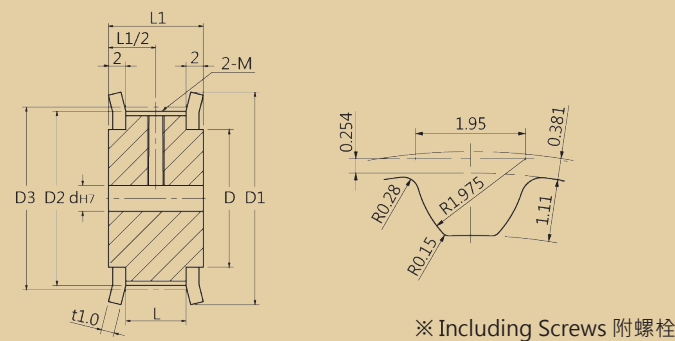

※ Including Screws 附螺栓

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA001-A	Aluminium 鋁合金	Anodizing 白色陽極	5 Working Days 5 個工作日
HFA001-B		Black Anodizing 黑色陽極	
HFA001-C		Hard Anodizing 硬質陽極	
HFA001-D		Nickel Electroless 無電解鍍	
HFA001-E	S45C 中碳鋼	-	
HFA001-F		Blackening 染黑	
HFA001-G		Nickel Electroless 無電解鍍	


The Tapped Hole Dimensions 螺紋孔尺寸表	
d	M
4~5	3
6~17	4
18~33	5
34~42	6
※ Apply for Hole Alteration II、III 適用於II、III加工服務	

Hole Alteration 孔加工服務	I Hole 孔	II Hole+Tap 圓孔+攻牙	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 雙邊軸頸孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(II) (u:1mm)	d(III) (u:1mm)	d(IV) (u:1mm)	d1(IV) (u:1mm)	d(V) (u:1mm)	d2&d3(V) (u:1mm)	L2(IV) (u:1mm)	L3&L4(V) (u:1mm)	Belt Width 皮帶寬度 (L/L1)	D	D1	D2	D3
HFA001-A HFA001-B HFA001-C HFA001-D HFA001-E HFA001-F HFA001-G	14	4~6	-	-	4	6	4	6	2≤L2≤L1-2	3~9	6mm 7/11	10	16	12.61	13.37
	15	4~6	-	-	4	6	4	6				11	18	13.56	14.32
	16	4~7	-	-	4/5	6/7	4/5	6/7				11	18	14.52	15.28
	18	4~8	4/5	-	4~6	6~8	4~6	6~8				13	20	16.43	17.19
	19	4~9	4~6	-	4~7	6~9	4~7	6~9				14	22	17.38	18.14
	20	4~9	4~6	-	4~7	6~9	4~7	6~9				14	22	18.34	19.10
	22	4~10	4~8	-	4~7	6~9	4~7	6~9				16	25	20.25	21.01
	24	4~10	4~10	-	4~7	6~9	4~7	6~9				16	25	22.16	22.92
	25	4~11	4~11	8/10/11	4~8	6~11	4~8	6~11				18	28	23.11	23.87
	26	5~11	5~11	8/10/11	5~8	7~11	5~8	7~11				18	28	24.07	24.83
	28	5~13	5~13	8~13	5~10	7~12	5~10	7~12				20	30	25.98	26.74
	30	6~15	6~14	8~14	6~13	8~15	6~13	8~15			15mm 17/21	23	32	27.89	28.65
	32	6~17	6~16	8~16	6~15	8~17	6~15	8~17				25	35	29.80	30.56
	34	6~20	6~18	8~18	6~18	8~23	6~18	8~20				28	40	31.71	32.47
	36	6~20	6~18	8~18	6~18	8~23	6~18	8~20				28	40	33.62	34.38
	40	8~24	8~23	8~23	8~22	10~24	8~22	10~24				32	44	37.44	38.20
	44	8~28	8~25	8~25	8~26	10~28	8~26	10~28				36	48	41.25	42.02
	48	8~30	8~25	8~25	8~28	10~30	8~28	10~30				38	50	45.07	45.84
	50	8~32	8~28	8~28	8~30	10~32	8~30	10~32				40	52	46.98	47.75
	60	8~38	8~33	8~32	8~36	10~38	8~36	10~38				46	61	56.53	57.30
	72	8~50	8~42	8~40	8~48	10~50	8~48	10~50				58	74	67.99	68.75

Order Ex. 訂購範例

HFA001-□-14-□-d-(d1-d2-d3)-□-(L2-L3-L4)-S3M-A



A B C D E F or G
Teeth
I II III IV or V
Internal Diameter of Hole
Internal Diameter of Hole(IV Type)
Internal Diameter of Hole(V Type)
Internal Diameter of Hole(V Type)
Width of Timing Pulley(6/10/15mm)
Length of Hole(IV Type)
Length of Hole(V Type)
Length of Hole(V Type)

選擇皮帶輪材質及表面處理方式
齒數
選擇孔加工類型(I/II/III/IV/V)
軸孔內徑
軸孔內徑(適用於IV型)
軸孔內徑(適用於V型)
軸孔內徑(適用於V型)
皮帶輪寬度(6/10/15mm)
軸孔長度(適用於IV型)
軸孔長度(適用於V型)
軸孔長度(適用於V型)

Alterations	追加加工名稱	Description 加工說明	Order Ex. 訂購範例
O		Set Screw Angle 變更止迴螺絲角度	HFA001-A-14-I-4-6-S3M-A-O Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)	HFA001-A-14-I-4-6-S3M-A-P3 Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)	HFA001-A-14-I-4-6-S3M-A-Q4 Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不銲接	HFA001-A-14-I-4-6-S3M-A-R Flange not Attached 法蘭不銲接
S		Flange Cut 法蘭切割	HFA001-A-14-I-4-6-S3M-A-S Flange Cut 法蘭切割