


# Precision Guide Pin with Flange

法蘭型精密卸料板導柱

HWP003

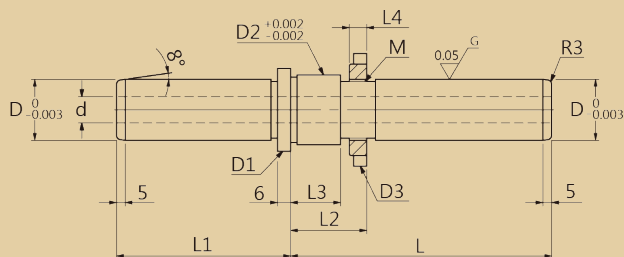

| Type<br>品名 | Roundness<br>真圓度 | Concentricity<br>同心(軸)度 | Material<br>材質      | Heat Treatment<br>熱處理    |
|------------|------------------|-------------------------|---------------------|--------------------------|
| HWP003     | 1.5μm            | 5μm                     | SUJ2(1.3505)<br>軸承鋼 | Surface Hardened<br>高頻淬火 |

| Type<br>品名 | Hardness<br>硬度 | Hardness Penetration<br>熱處理深度 | Delivery<br>交貨日          |
|------------|----------------|-------------------------------|--------------------------|
| HWP003     | HRC62±2        | 1.5~2mm                       | 7 Working Days<br>7 個工作日 |

| Type   | D  | L   | M       | D1 | D2 | D3 | d  | L1  | L2 | L3 | L4 |
|--------|----|-----|---------|----|----|----|----|-----|----|----|----|
| HWP003 | 19 | 120 | M22x1.5 | 32 | 25 | 40 | 8  | 80  | 45 | 29 | 9  |
|        | 25 | 120 | M28x1.5 | 38 | 30 | 50 | 12 | 80  | 45 | 29 | 10 |
|        | 32 | 140 | M35x1.5 | 46 | 36 | 55 | 20 | 100 | 50 | 34 | 11 |
|        | 40 | 140 | M45x1.5 | 56 | 46 | 68 | 28 | 100 | 50 | 34 | 12 |

Order Ex. 訂購範例

HWP003-D-L

| Alterations | 追加工名稱                                                                               | Description             | 加工說明 | Order Ex.                                                | 訂購範例 |
|-------------|-------------------------------------------------------------------------------------|-------------------------|------|----------------------------------------------------------|------|
| A           |  | Length change<br>長度尺寸變更 |      | HWP003-19-A117<br>Length change to 117mm<br>長度尺寸變更為117mm |      |