


Guide Post for Mold

模架用大導柱

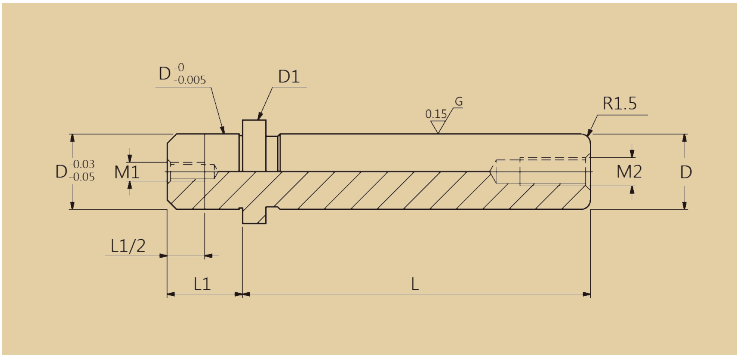

Type 品名	Roundness 真圓度	Concentricity 同心(軸)度	Material 材質	Heat Treatment 熱處理
HUP002	2μm	5μm	SUJ2(1.3505) 軸承鋼	Surface Hardened 高頻淬火

Type 品名	Hardness 硬度	Hardness Penetration 熱處理深度	Delivery 交貨日
HUP002	HRC62±2	1.5~2mm	5 Working Days 5 個工作日

Type	D	TOL.	L	L1	D1	M1	M2
HUP002	25	+0.020 +0.015	80/90/100/110/120/130/140/150/160/170/180/190/200	24	32.6	M6	M6
	32	+0.025 +0.020	100/110/120/130/140/150/160/170/180/190/200/220/240/280	30	40.6	M6	M6
	40	+0.030 +0.025	110/120/130/140/150/160/170/180/190/200/220/240/280	37	50.8	M10	M10
	50	+0.035 +0.030	110/120/130/140/150/160/170/180/190/200/220/240/280/320/360/400	45	63.8	M12	M10

Order Ex. 訂購範例

HUP002-D-L

Alterations	追加工名稱	Description	加工說明	Order Ex.	訂購範例
A		Length change 長度尺寸變更		HUP002-25-A117 Length change to 117mm 長度尺寸變更為117mm	

※ u=unit

Visit us : www.hdw.com.tw
Contact : headway@hdw.com.tw

European/American Standard
歐美規格