


Ejector Leader Pins-Single End Stepped Type

精密級頂出導銷-一端台階型

HAP028

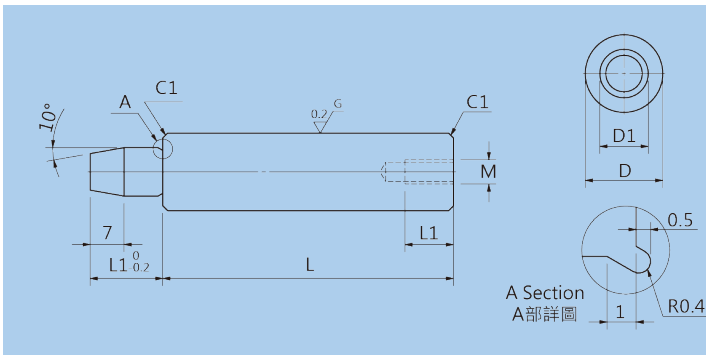

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Hardness Penetration 熱處理深度	Delivery 交貨日
HAP028	SUJ2(1.3505) 軸承鋼	Surface Hardened 高頻淬火	HRC58~ (L Part) (L部)	1.5~2mm	3 Working Days 3 個工作日

OD. TOL. 外徑公差	
D	TOL.
13~16	-0.016 -0.027
20~30	-0.020 -0.033
35~40	-0.025 -0.041

D1 TOL. D1公差	
D1	TOL.
8~10	-0.025 -0.040
20	-0.040 -0.061

Type	D	L(u:5mm)	D1	L1	MxP
HAP028	13	40~150	8	12	M6x1.0
	16	50~150	10	15	M6x1.0
	20	50~150	10	15	M8x1.25
	25	50~150	10	15	M8x1.25
	30	50~300	20	20	M6x1.0
	35	50~300	20	20	M6x1.0
	40	90~300	20	20	M6x1.0

Order Ex. 訂購範例

HAP028-D-L

Alterations	追加加工名稱	Description	加工說明	Order Ex.	訂購範例
K		Tapping size change 牙孔尺寸變更		HAP028-13-100-K3 Tapping size change to K3 牙孔尺寸變更為K3	

※ u=unit

Visit us : www.hdw.com.tw
Contact : headway@hdw.com.tw